

# B&P

LAMP SUPPLY, INC.

843 Old Morrison Hwy., McMinnville, TN 37110

931-473-3016

fax: 931-473-3014

CustomerService@bplampsupply.com

Dear Customer,

Thank you for your purchase of our B&P Lamp Supply® Library Lamp. Each lamp is checked for quality assurance before it leaves our hands. If you have any questions about the assembly of your fixture, please give us a call at (800) 822-3450. We appreciate your business and hope you enjoy your Library Lamp for many generations.

Sincerely,  
B&P Lamp Supply  
[www.bplampsupply.com](http://www.bplampsupply.com)

## Contents:

Dome Shade, Chimney, Lamp Frame, Prisms\*

## Assembly Instructions:

**Step 1)** Install the fixture to the desired location (See Page 2). Do not assemble the shade, chimney or prisms. Restore power and make sure the fixture is operating properly.


**Step 2)** Position prisms around the shade band.\*

**Step 3)** Place shade on shade band. Make sure the shade is properly fit on the band and the fixture is well balanced and not leaning.

**Step 4)** Place crown on top of shade. Some Lamps may not have a crown, so proceed to step 5.

**Step 5)** Install the chimney. Mount the chimney by slipping its base inside the springy tines that rise above the burner. Try to apply light pressure to the tines as the chimney goes down so that the chimney will be held in center of the burner. If the tines are bent, lightly bend them back to perpendicular so that all tines apply equal pressure on the chimney base. The chimney should fit snugly on the burner.

**The Library Lamp Fixture is now completed.**

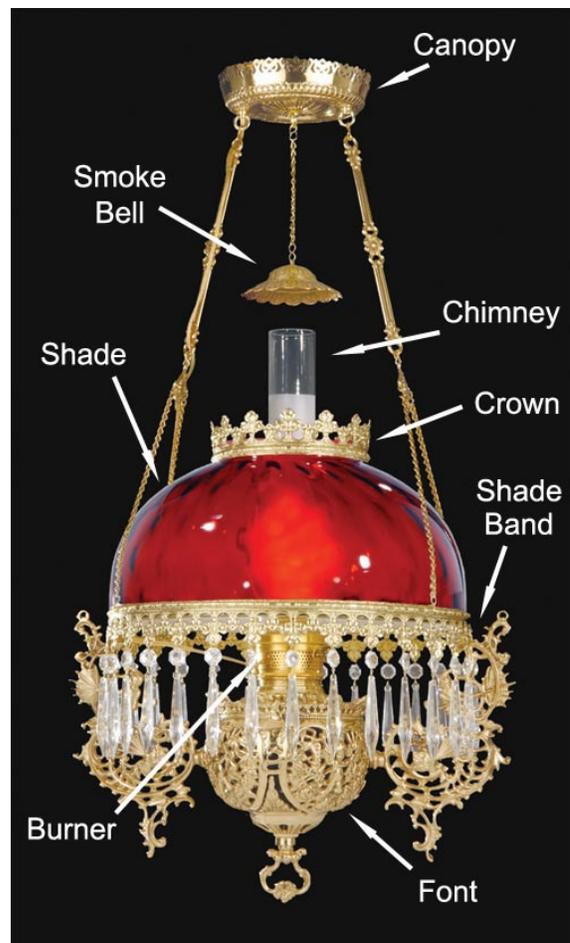

\*depending on model, not all library lamps have prisms


**Installation Instructions:**

**Step 1)** Shut off the power to the circuit by turning off the breaker or removing the fuse. Just turning the light switch off will not protect against possible electrical shock.


**Step 2)** Attach crossbar to the electrical box. (Figure 1)

**Step 3)** Feed wires through the center hole in crossbar. Connect threaded rod to cross bar and turn clockwise to tighten the rod. Do not completely tighten the rod to ceiling.

**Step 4)** Connect the wiring. Connect the ground wire to the green screw on the crossbar in the electrical box. (Figure 2) Connect the ribbed fixture wire to the white house wire and the smooth fixture wire to the black house wire. Cap each wire with a wire nut and tape the connection. Tuck each wire into canopy. (Figure 3)

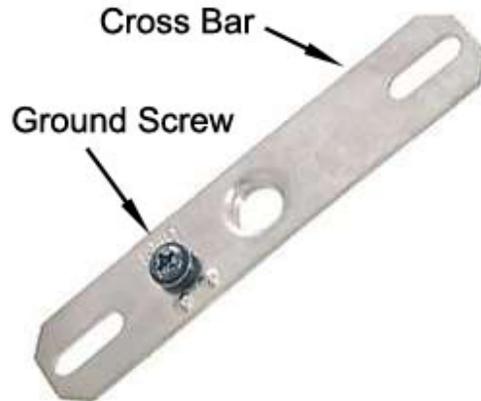


(Figure 1)

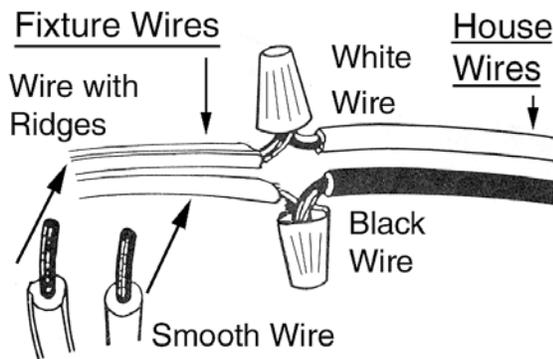

(Figure 2)



(Figure 4)

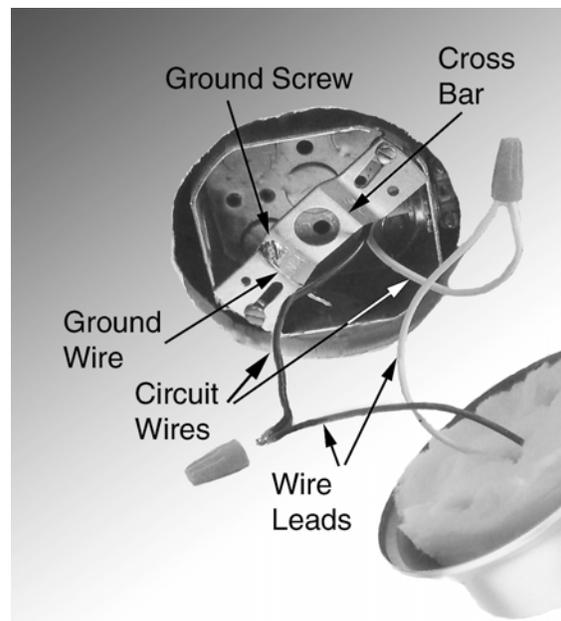

(Figure 3)